



everled
Think Green

ABOUT US

- 2. The brand
- 3. Support
- 4. Warehouse

PRODUCTS

LINEAR FIXTURES

- 6. ELR - Architectural Linear Panel
- 7. ELS - Architectural Linear Panel
- 8. UP&DOWN Pendant
- 9. VERTICAL Linear
- 10. TGRID
- 11. ZETA Linear

DOWNLIGHTS

- 12. ECP - DOWNLIGHT

- 13. EMERGENCY BACKUP DRIVERS

INDEX



ABOUT US

THE BRAND



Our luminaires are manufactured under high quality standards. They are tested for optimal performance according to US standards. They have high efficiency, low glare (UGR), and good color rendering index (CRI>80). All products have high durability, long service life and 5-year warranty.

We are a group of passionate lighting professionals that make things right; from R&D to customer service, we are here to bring better lighting products to the world.

Think Different

We admire the 1984 Apple ads “Think Different”. Unlike our competitors, we are the crazy ones that insist on our product innovation and quality.

This is **Everled**. Think green.



SUPPORT



5 YEARS LIMITED WARRANTY

EVERLED warrants that each of its LED lighting fixtures (the "Product(s)") that are purchased while this Warranty is in effect will be free from defects in materials and workmanship for the Warranty Period. The Warranty Period runs from the date of original purchase from **LP LED LIGHTING AND CONTROLS, LLC**, in the **USA**.

If a Product fails to operate during the Warranty Period as a result of defects in materials or workmanship, EVERLED will, at its option, replace it with the same or like product at no charge or will issue a credit which may be used by the purchaser

For see more Additional Terms and Conditions, please ask for more information to our sales rep.

CERTIFICATIONS



WAREHOUSE | HOUSTON, TEXAS

Our new warehouse in Houston, Texas allows us to keep products in stock for quick delivery to all of our customers' forwarders in Miami.



10641 S Sam Houston Pkwy West, Suite 100. Houston, TX 77071

QUICKSHIP

Quickship is a broad offering of architectural luminaires shipped within 24 hours. Same Day Shipping If placed by 1pm CDT. Quickship gives you the ability to meet tight project schedules without sacrificing quality or selection.



+ PRODUCTS




PÁG. 6-7




Architectural Linear Panel

PÁG. 8

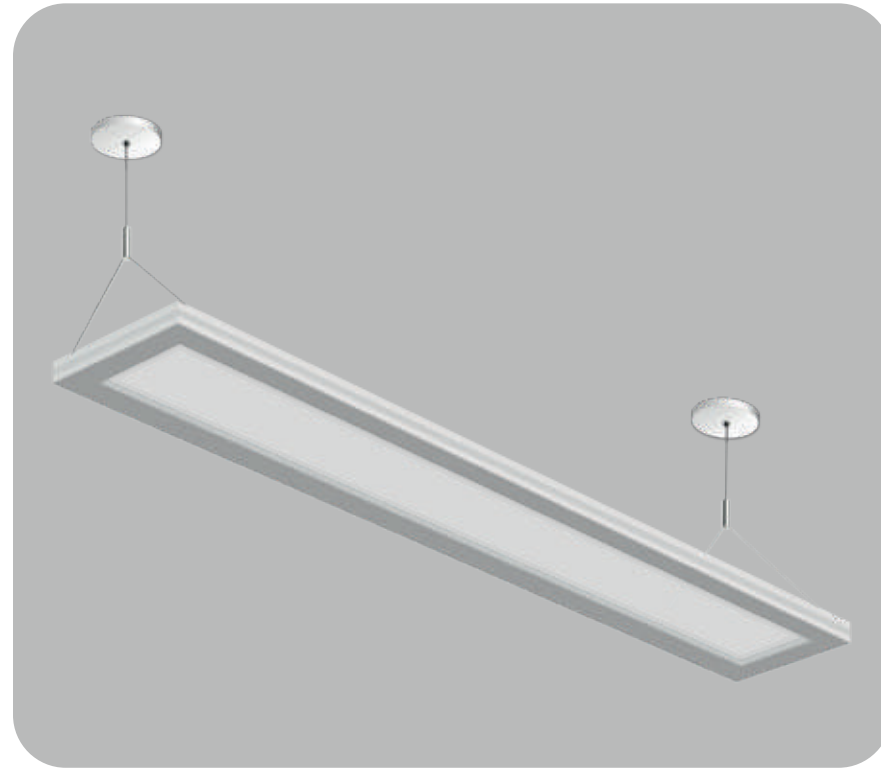


Up-down

PÁG. 9

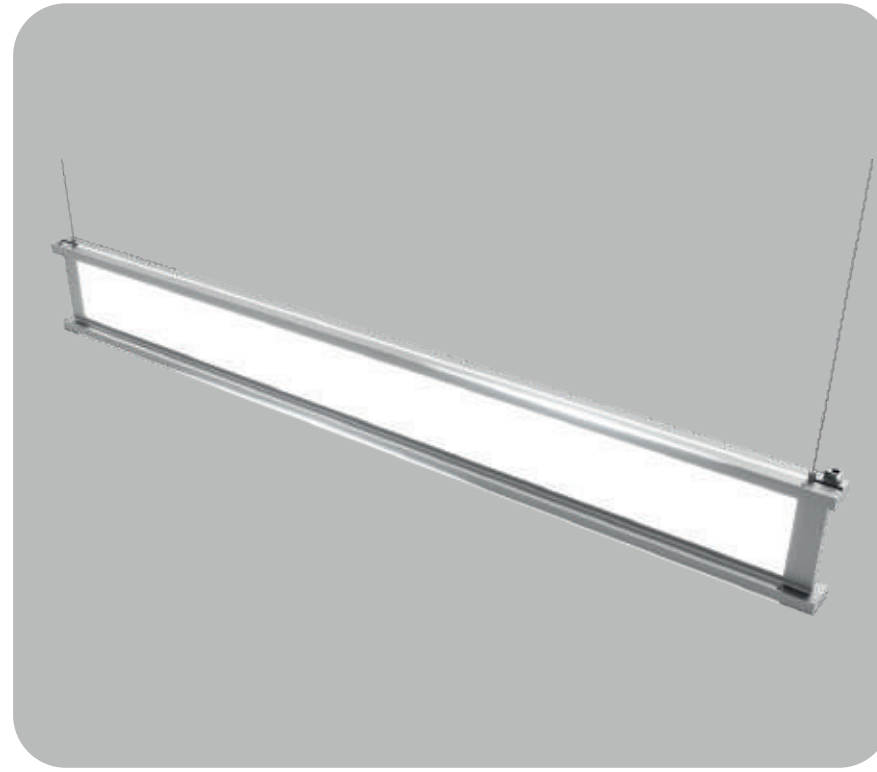

Vertical

PÁG. 10

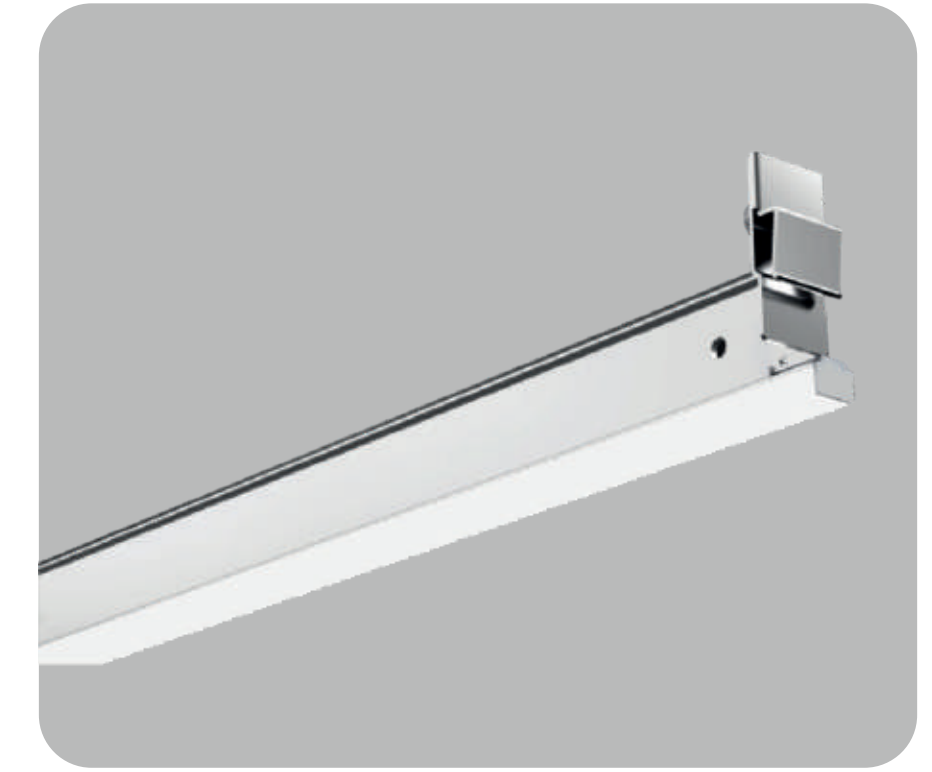

T-GRID

PÁG. 12




Zeta Linear Series

PÁG. 13




ECPS Downlights

PÁG. 6-7

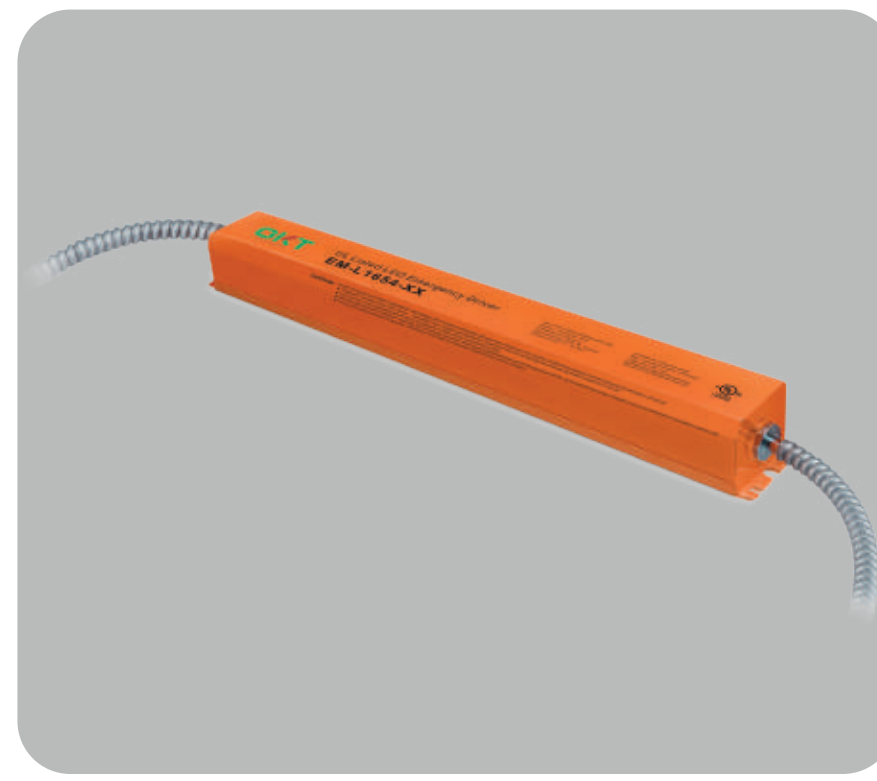

Emergency Driver

Architectural Linear Panel | ELR

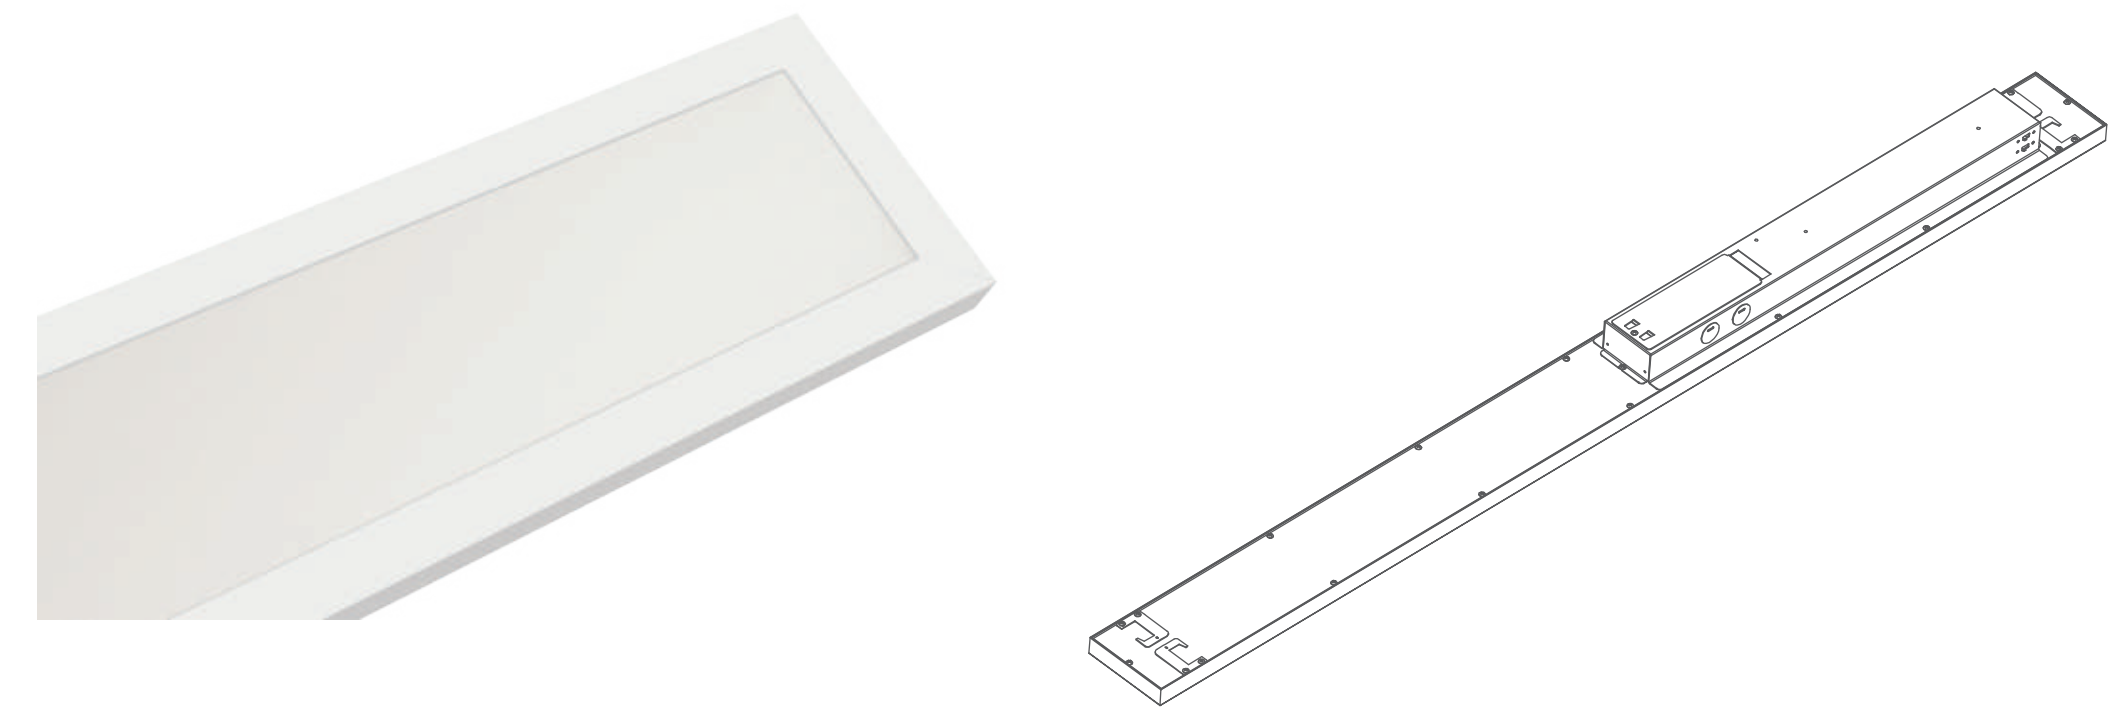

ELR
Ultra-thin profile 0.59" (15mm)
Lengths from 2 - 8 feet
Perfect for recessed installation
Warranty: 5 years limited warranty

Specification

MODEL	DIMENSION	CCT ADJUSTABLE	WATTAGE SELECTABLE		
			LOW	MEDIUM	HIGH
ELR24	4"X2'	3000K/3500K/4000K	20W (1600LM/1800LM/1700LM)		
ELR26	6"X2'	3000K/3500K/4000K	20W (1900LM/2100LM/2000LM)		
ELR44	4"x4'	3000K	22W-1870LM	30W-2550 LM	40W-3400 LM
		3500K	22W-2090LM	30W-2850 LM	40W-3800 LM
		4000K	22W-1980LM	30W-2700 LM	40W-3600 LM
ELR46	6"x4'	3000K	22W-2090LM	30W-2850LM	40W-3800 LM
		3500K	22W-2420LM	30W-3300 LM	40W-4400 LM
		4000K	22W-2200LM	30W-3000 LM	40W-4000 LM
ELR84	4"x8'	3000K	46W-3910LM	60W-5100 LM	80W-6800 LM
		3500K	46W-4370LM	60W-5700 LM	80W-7600 LM
		4000K	46W-4140LM	60W-5400 LM	80W-7200 LM
ELR86	6"x8'	3000K	46W-4370LM	60W-5700 LM	80W-7600 LM
		3500K	46W-4830LM	60W-6300 LM	80W-8400 LM
		4000K	46W-4600LM	60W-6000 LM	80W-8000 LM



Adjustable CCT




Adjustable WATTS

- 2700K
- 3000K
- 3500K
- 4000K
- 4500K
- 5000K

* CONSULT AVAILABILITY



Architectural Linear Panel | ELS

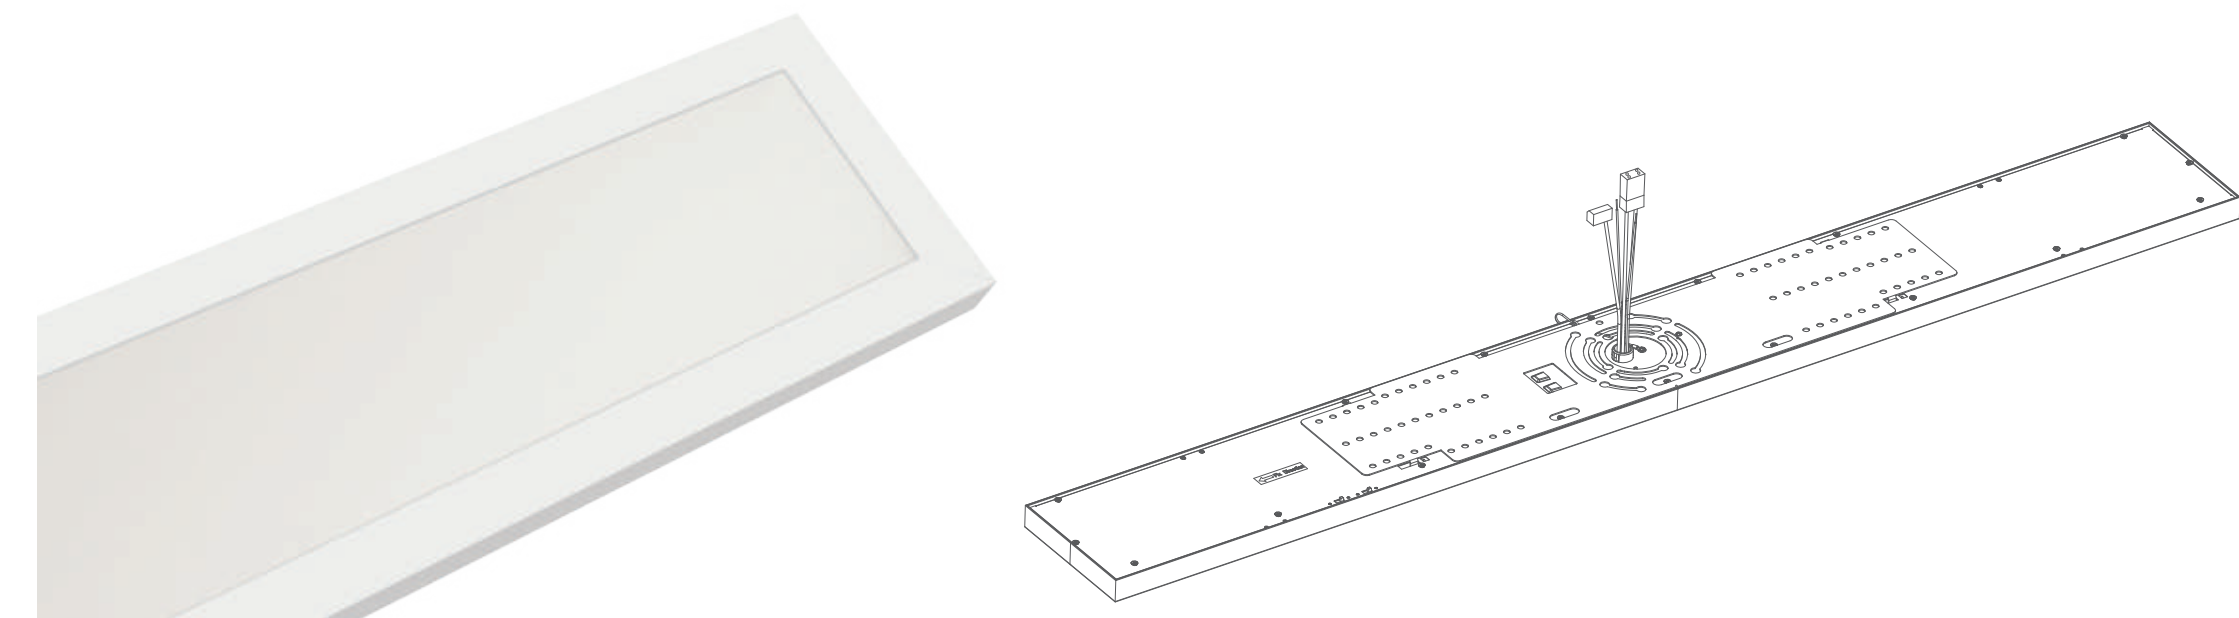

ELS

Contemporary profile - less than 1"
Lengths from 2 - 4 feet
Designed for dual installation: Surface and Recessed
Integrated driver to fit more ceiling types and walls
Warranty: 5 years limited warranty

Specification

MODEL	DIMENSION	CCT ADJUSTABLE	WATTAGE SELECTABLE		
			LOW	MEDIUM	HIGH
ELS24	4"X2'	3000K/3500K/4000K	20W (1500LM/1700LM/1600LM) (NON-Adjustable)		
ELS62	6"X2'	3000K/3500K/4000K	20W (1600LM/1800LM/1700LM) (NON-Adjustable)		
ELS44	4"x4'	3000K	20W-1500LM	30W-2250LM	40W-3000LM
		3500K	20W-1700LM	30W-2550LM	40W-3400LM
		4000K	20W-1600LM	30W-2400LM	40W-3200LM
ELS64	6"x4'	3000K	20W-1800LM	30W-2700LM	40W-3600LM
		3500K	20W-2000LM	30W-3000LM	40W-4000LM
		4000K	20W-1900LM	30W-2850LM	40W-3800LM



Adjustable CCT




Adjustable WATTS

- 2700K
- 3000K
- 3500K
- 4000K
- 4500K
- 5000K

* CONSULT AVAILABILITY



UP & DOWN Pendant | UDP

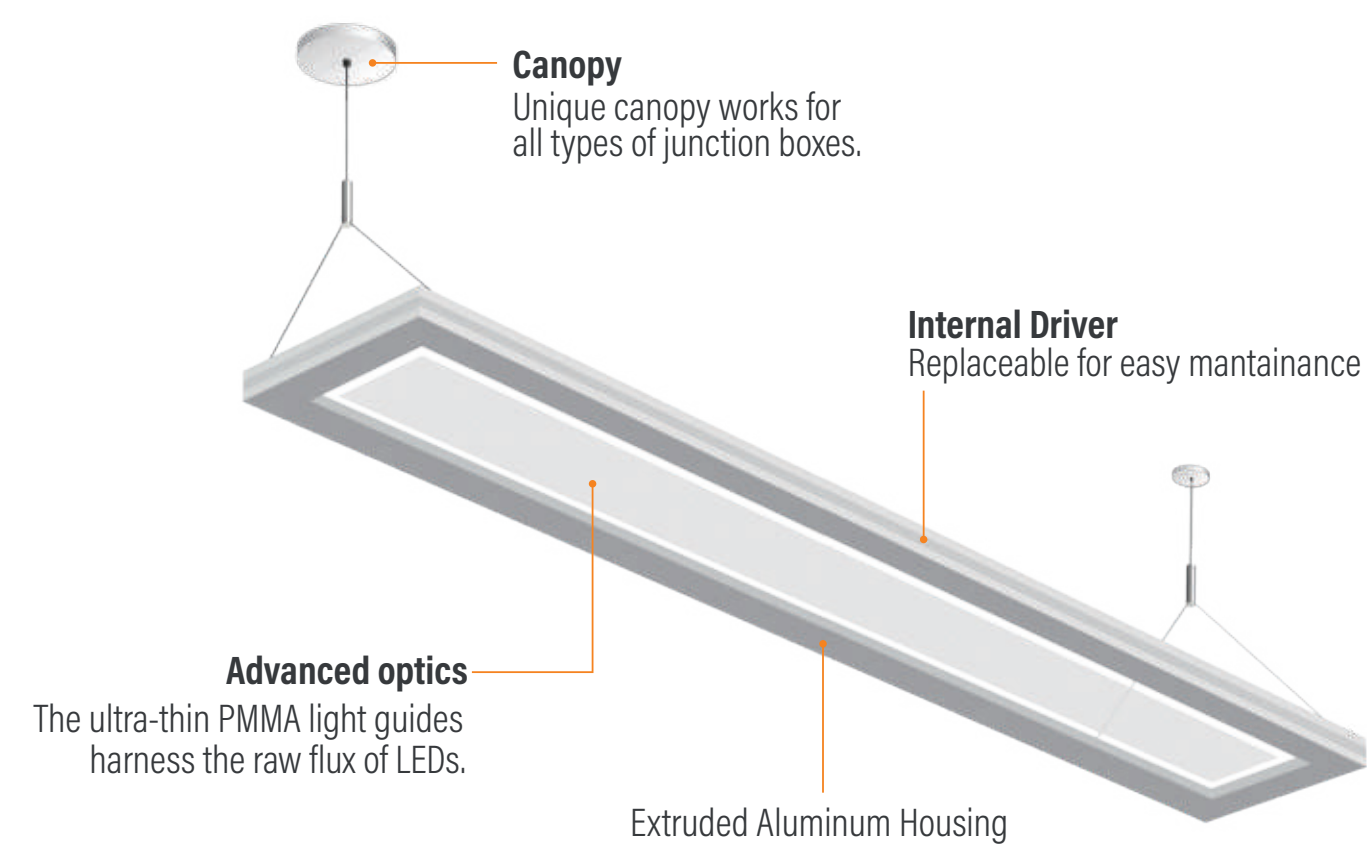


Adjustable CCT

- 3000K
- 3500K
- 4000K

UDP

Pendant Fixture
Lengths of 4 and 8 feet
Direct and indirect lighting in a 55:45 split
Seamless continuous runs
Warranty: 5 years limited warranty

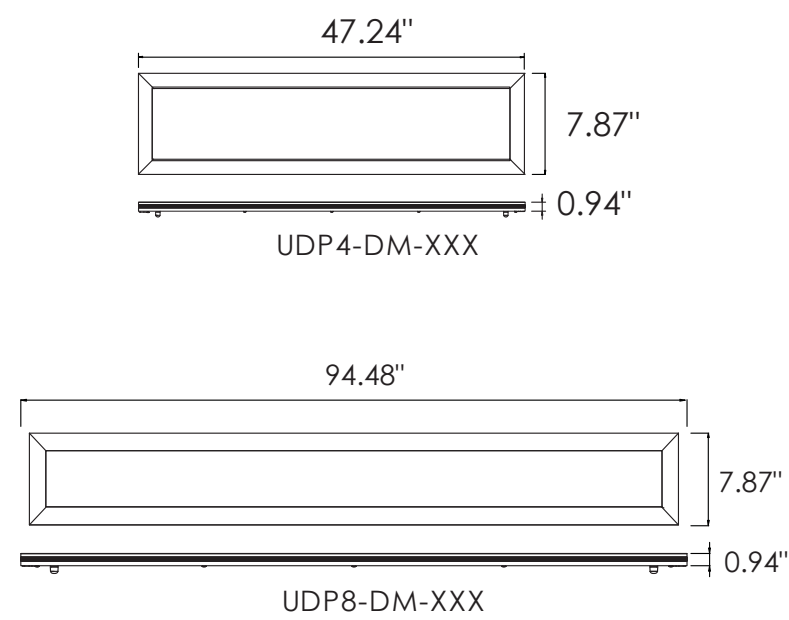


Specification

Model	Size	Input Power	Efficacy	Luminous Flux	DLC CCT	Function	Driver
UDP4-DM-XXX	8"x4FT	40 Watts	105lm/w	4200lm	3000K	0-10V Dimming & Tunable White	Internal & Replaceable
UDP8-DM-XXX	8"x8FT	80 Watts	105lm/w	8400lm	3500K	0-10V Dimming	
UDE14-DM-XXX	1x4FT	54 Watts	105lm/w	5670lm	4000K	0-10V Dimming	



Vertical Linear | ELV

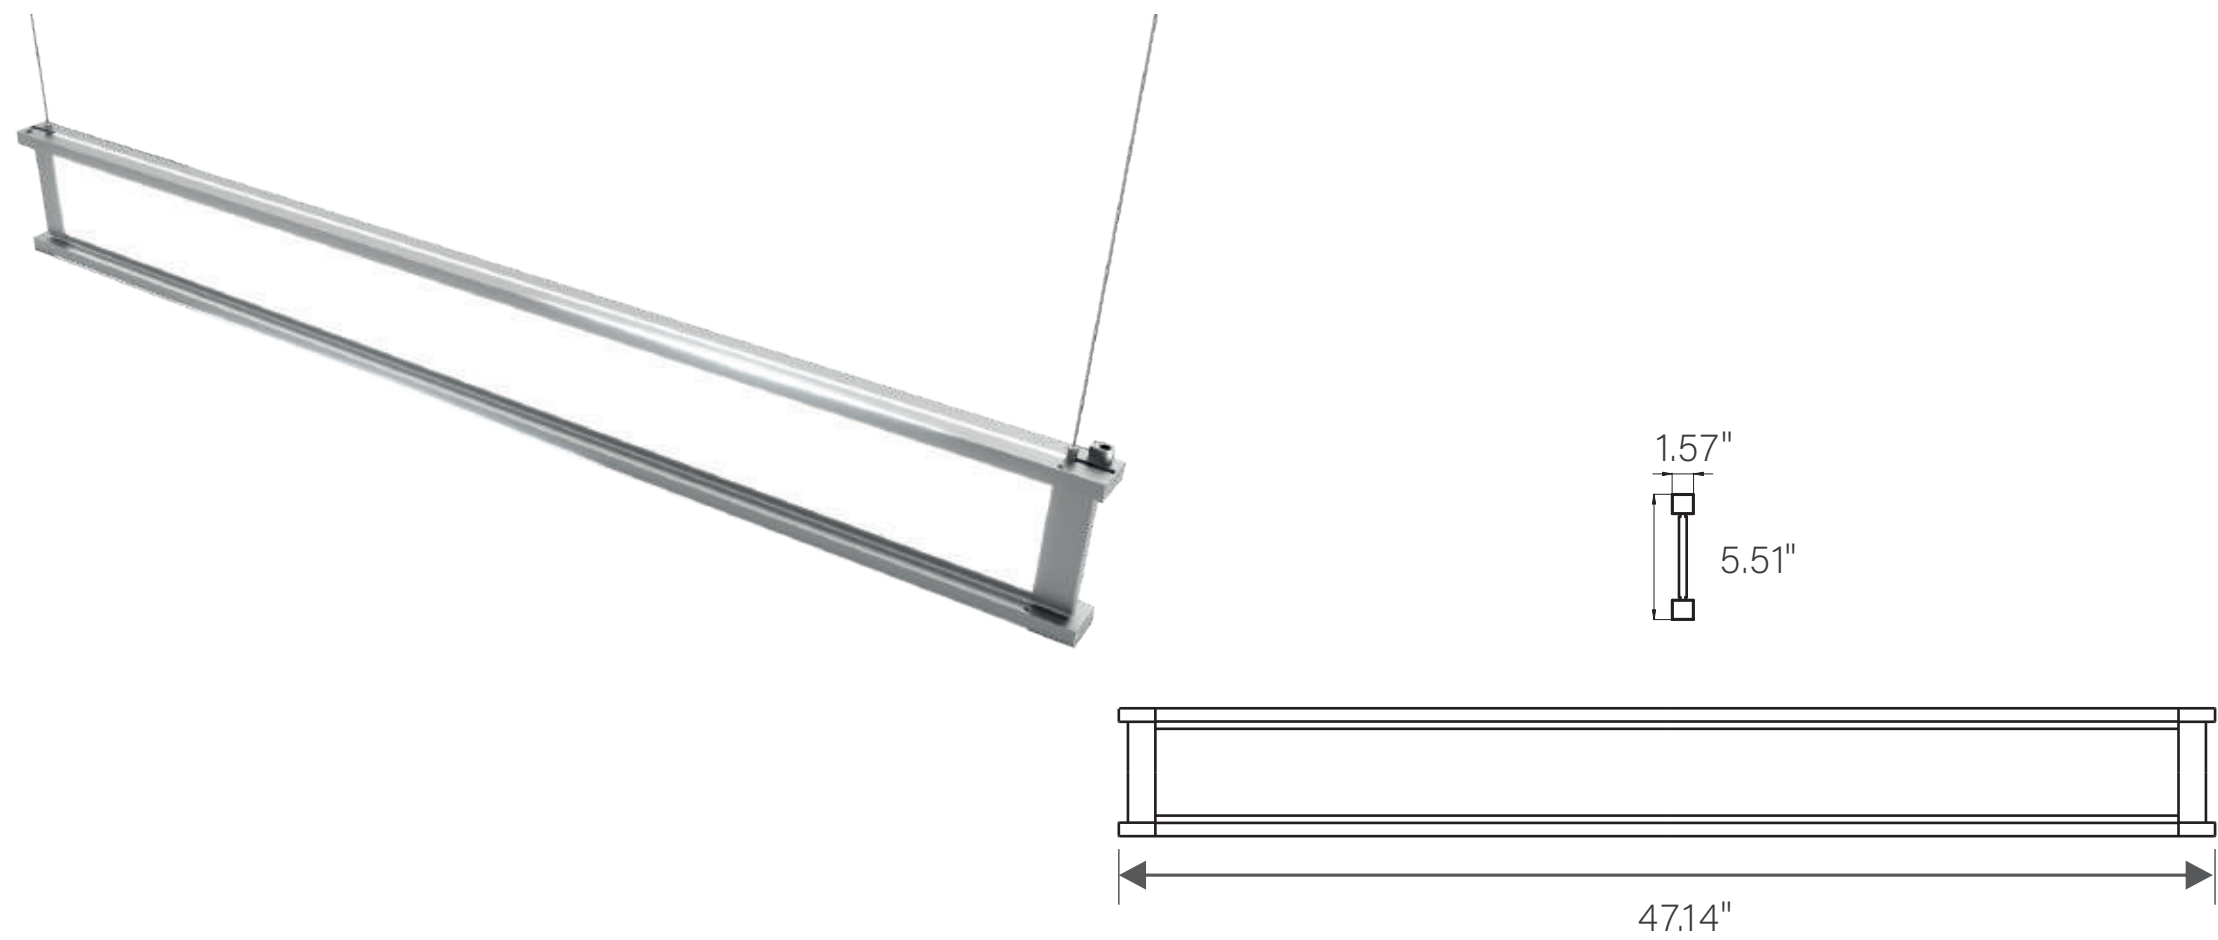


Adjustable CCT

- 3500K
- 4000K
- 5000K

ELV

Pendant Fixture - 4 feet
Ultra-thin transparent vertical optics
Direct and horizontal indirect lighting
Seamless continuous runs
Warranty: 5 years limited warranty

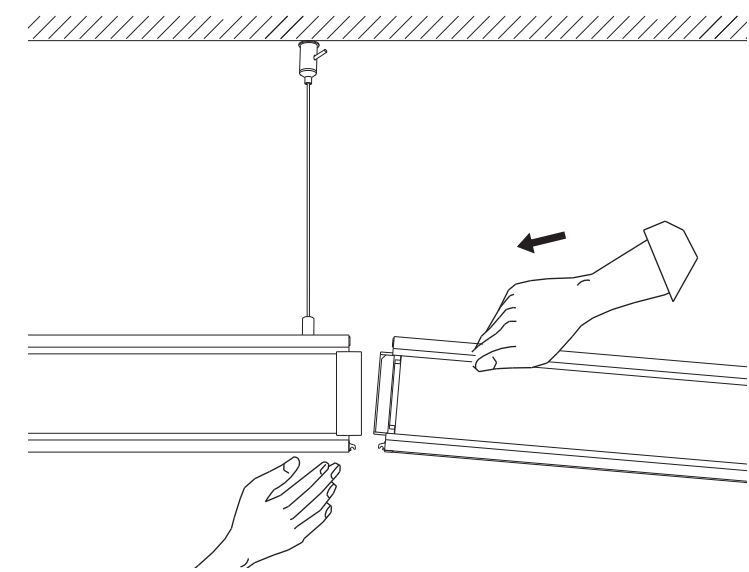


Specification

Model	Size	Input Power	Efficacy	Luminous Flux	DLC CCT	Function	Optics
ELV4-ITWDD	4FT	50 Watts	110lm/w	5500lm	3500K 4000K	0-10V Dimming & Tunable White	Diffusing
ELV4-ITWDL	4FT	50 Watts	110lm/w	5500lm	5000K	0-10V Dimming & Tunable White	Louver



T-GRID LED | ETB

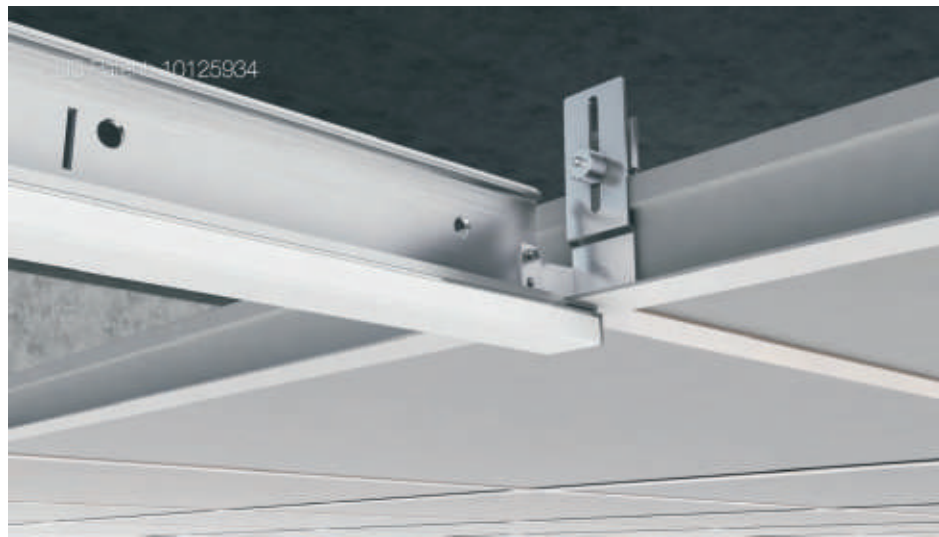

Fixed CCT

3500K


4000K

5000K

ETB

Linear Fixture that integrates into grid suspended ceilings
Compatible with 9/16" and 15/16" grids
Seamless continuous runs
Allows flexible designs

Warranty: 5 years limited warranty

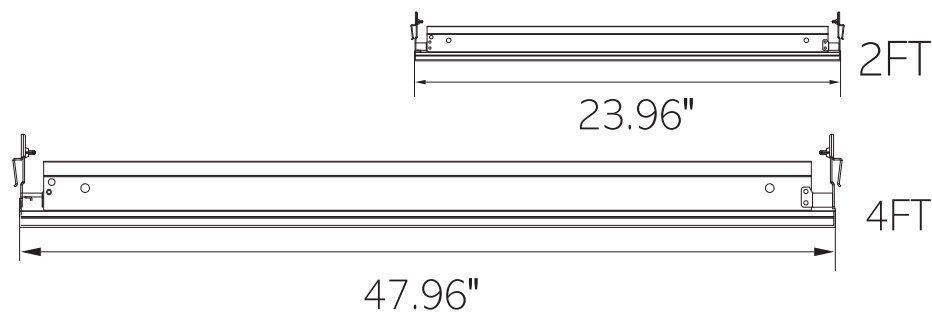


Specification

Product Category	Size	Dimming	Fixture wattage	CCT	Type
ETB	2=2FT 4=4FT	D=0-10V dimming	M=10W (2FT) M=20W (4FT)	30=3000k 35=3500k 40=4000k 50=5000k	F=9/16" U= 15/16"



ZETA LINEAR | ZE

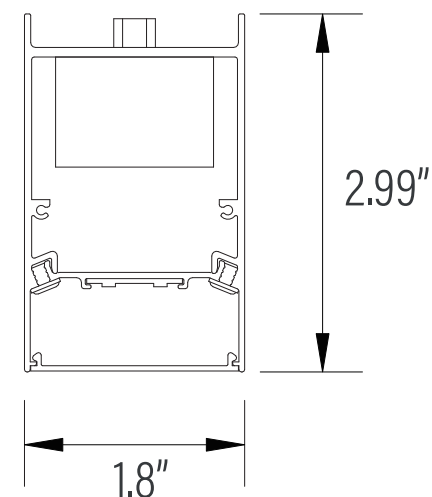

Adjustable CCT



Adjustable WATTS

3000K

3500K

4000K

* CONSULT AVAILABILITY


ZE

Combining superior esthetics, quality performance and unparalleled versatility, Zeta offers new opportunities to capture the beauty and benefits of true lighting. Three form sizes (1.3" , 1.8" , 2.3")
Versatile and Streamlined
Wide Range Of Distributions
Warranty: 5 years limited warranty


Specification

Finish	Lumen Package		
	High	Medium	Low
White Finish	1000lm/ft , 10w/ft	750lm/ft , 7.5w/ft	500lm/ft , 5w/ft
Black Finish	800lm/ft , 10w/ft	600lm/ft , 7.5w/ft	400lm/ft , 5w/ft


Pendant




Surface



Wall Mount



Recessed




LINEAR FIXTURES



DOWNLIGHT

| ECP

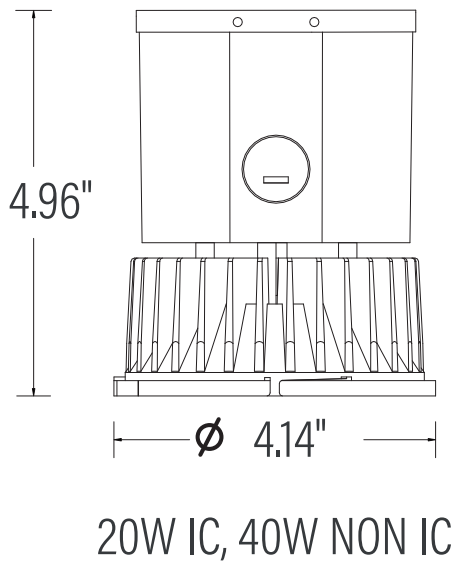

Adjustable CCT



Adjustable WATTS

3000K

3500K

4000K

5000K


* CONSULT AVAILABILITY

ECP

Recessed Downlight 4" & 6"
Round and Square Trims available
White Trim
Compatible with reftofti and new constructions
Warranty: 5 years limited warranty


Specification

Model	Size	Input Power	Efficacy	Luminous Flux	CCT	Mounting	Driver
ECPS-D40W-35T	4"	40 Watts	80lm/w	3200 lm	SWITCHABLE WHITE 3000K 3500K 4000K	Recessed	0-10V
	6"	34 Watts	80lm/w	2720 lm			
	6"	27 Watts	80lm/w	2160 lm			



The Twist & Lock feature allows for easy, tool-free installations and seamless integration of multiple trims.

CYLINDER | CY

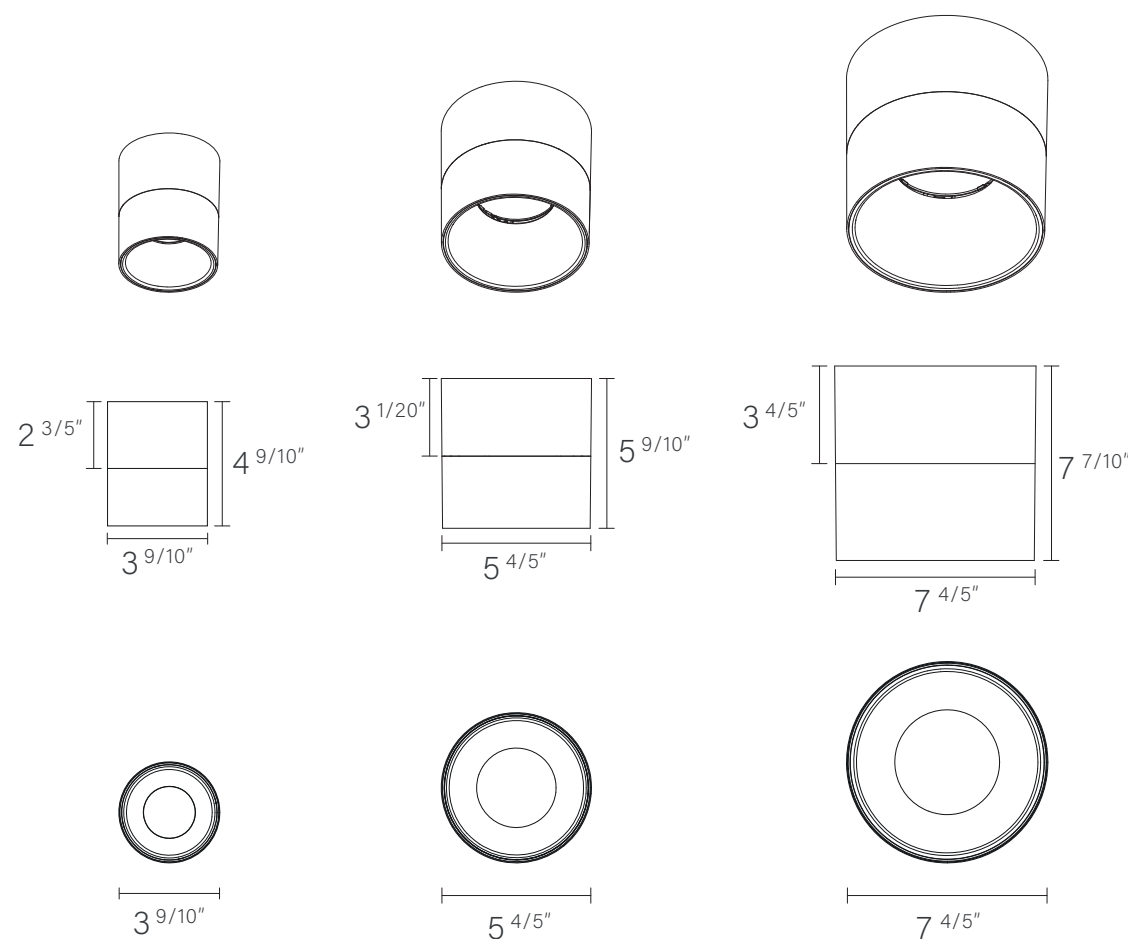

Fixed CCT



Adjustable WATTS

2700K

3000K

3500K

4000K

CY

Suspended Cylinder with modular design
COB LED for high visual comfort
Offers a variety of technical and design options
Available for suspended and surface mounting
Warranty: 5 years limited warranty

Specification

Dimension	Wattage Selectable	Efficacy	Lumens
4"	11w / 18w / 25w	95lm / w	1045 - 2350lm
6"	20w / 30w / 40w	105lm / w	2100 - 4200lm
8"	30w / 45w / 60w	90lm / w	2700 - 5400lm

White Exterior Finishes



Black Exterior Finishes




DOWNLIGHTS



EMERGENCY

| EEM

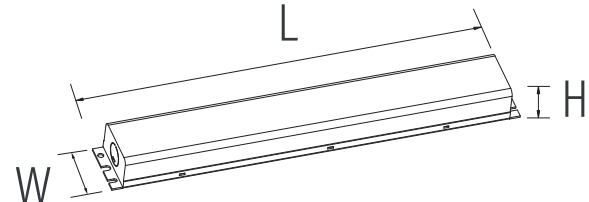

Model	L	W	H
EM-L0854-LBF	10.64"	1.98"	1.32"
EM-L2554-LBF	15.40"	2.13"	1.57"

Model	L	W	H
EM-H08170-LBF	12.76"	2.13"	1.57"
EM-H25170-LBF	15.4"	2.13"	1.57"

EEM

LED Emergency Driver
Minimum 90 minutes of autonomy
Low and High voltage options
Warranty: 5 years limited warranty

Specification

Model	Output Power	Emergency Operation	Recharge Time	Input Voltage	Dimensions
EEM-L0854-LBF	8 Watts	≥90 Minutes	24 Hrs	100-277VAC 50-60Hz	10.64"×1.98"×1.32"
EEM-L2554-LBF	25 Watts		36 Hrs		15.4"×2.13"×1.57"
EEM-H08170-LBF	8 Watts		24 Hrs		12.76"×2.13"×1.57"
EEM-H25170-LBF	25 Watts		36 Hrs		15.4"×2.13"×1.57"



